

MODULAR, .025" SQUARE SYSTEM STRIP HEADER

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Phosphor Bronze

Contact Plating: See options below

ELECTRICAL


Current Rating: 1 AMP

CA- [SERIES] [POSITION] -24 [PLATING] -44


Consult factory for additional pin length options

SERIES	POSITION	PLATING
S = Single Row	Single 01 thru 40	B = 10μ IN gold
D = Dual Row	Dual 04 thru 80	C = 15μ IN sel gold
T = Triple Row	Triple 09 thru 108	T = 150μ IN tin


SINGLE ROW

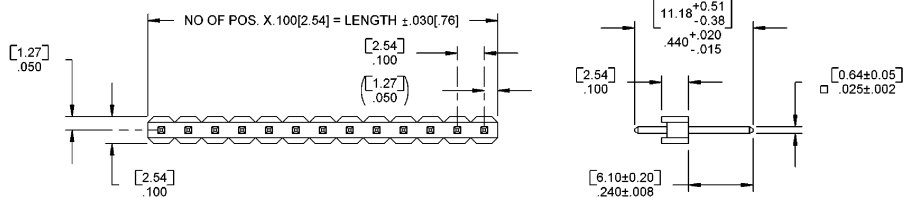

DUAL ROW

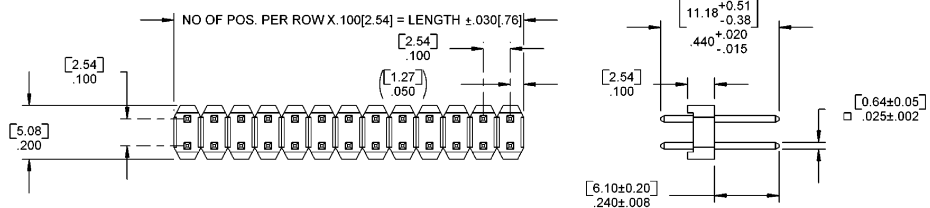

TRIPLE ROW

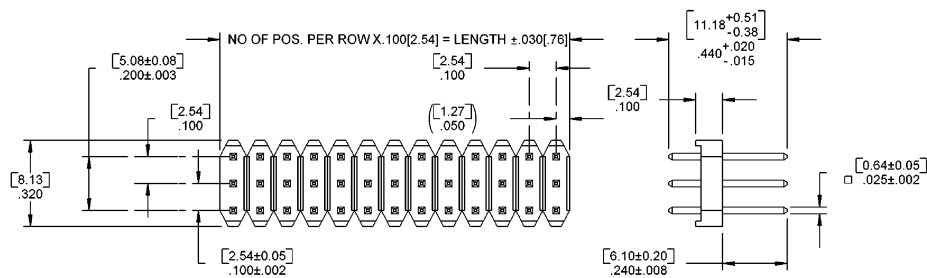

Mating Product: IDS3 (page 78), IDS2 (page 80), FID (page 79), SJ (page 116), VSC (page 117)

Drawing Number: CA-620389



For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298