

## MODULAR, .025" SQUARE SYSTEM STRIP HEADER, VALUE LINE

### SPECIFICATIONS

#### ENVIRONMENTAL

Temperature Range: -55°C to +105°C

#### MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Copper Alloy

Contact Plating: See options below


#### ELECTRICAL

Current Rating: 1 AMP

Consult factory for additional pin length options

CA-   -24  -46

SERIES	POSITION	PLATING
S = Single Row	Single 01 thru 40	A = gold flash
D = Dual Row	Dual 04 thru 80	B = 10μ IN gold
T = Triple Row	Triple 09 thru 108	C = 15μ IN sel gold
		T = 150μ IN tin

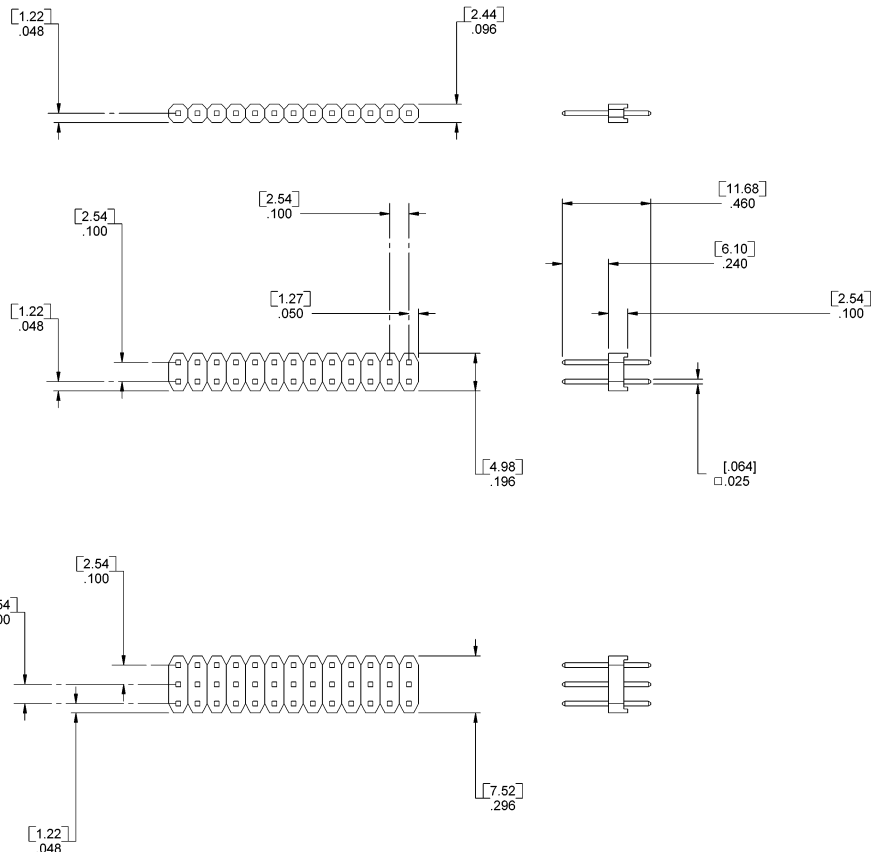

Mating Product: IDS3 (page 78), IDS2 (page 80), FID (page 79), SJ (page 116), VSC (page 117)  
 Drawing Number: CA-620390



5