



**.025" DUAL LAMINATED MICRO
QUICK-TWIST PVC CABLE
IDT FLAT RIBBON CABLE**

SPECIFICATIONS

Temperature Rating: +105°C

MECHANICAL

Insulation: PVC

Conductor: 30 AWG, 7/38 stranded, tinned copper wire

Span Length: Center of flat section to center of flat section
See option below

ELECTRICAL

Voltage Rating: 30V - UL


UL Style No.: 20528

250mm Impedance: 85 ohms, single ended
110 ohms, differential

125mm Impedance: 80 ohms, single ended
105 ohms, differential

CA-68MTD-PVC- SPAN

SPAN LENGTH
Blank = 9.84" [250mm]
125 = 4.92" [125mm]

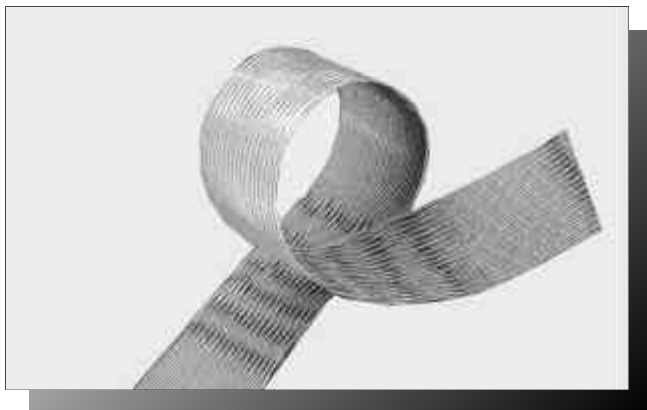

**.025" DUAL LAMINATED SUB-MICRO
QUICK-TWIST PVC CABLE
IDT FLAT RIBBON CABLE**

SPECIFICATIONS

Temperature Rating: +105°C

MECHANICAL

Insulation: PVC

Conductor: 30 AWG, 4/40 stranded, tinned copper wire

Span Length: Center of flat section to center of flat section
See option below

ELECTRICAL

Voltage Rating: 30V - UL

UL Style No.: 20528

250mm Impedance: 86 ohms, single ended
120 ohms, differential

133mm Impedance: 90 ohms, single ended
125 ohms, differential

CA-68MTD-PVC-32- SPAN

SPAN LENGTH
Blank = 9.84" [250mm]
133 = 5.24" [133mm]