

Pitch: .100" x .200"

EDGE CARD .610" HIGH

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled polyester, green, UL94V-0

Contact Material: Copper Alloy

Contact Plating: Solder Tail

Contact Area: 20µ IN gold

Tail Area: 150µ IN tin

Wrap Tail

Contact Area: 20µ IN gold

Tail Area: gold flash

ELECTRICAL


Current Rating: 1 AMP

Consult factory for additional options

CA- POSITION EC2-3- TAIL

POSITION	TAIL OPTION
24 44	SD = Solder Tail, .165"
34 50	1W = Wrap Tail, .325"
36 60	
40 62	

DIMENSIONS		
Position	A	C
24	1.460 [37.08]	1.300 [33.02]
34	1.960 [49.78]	1.800 [45.72]
36	2.060 [52.32]	1.900 [48.26]
40	2.260 [57.40]	2.100 [53.34]
44	2.460 [62.48]	2.300 [58.42]
50	2.760 [70.10]	2.600 [66.04]
60	3.260 [82.80]	3.100 [78.74]
62	3.360 [85.34]	3.200 [81.28]

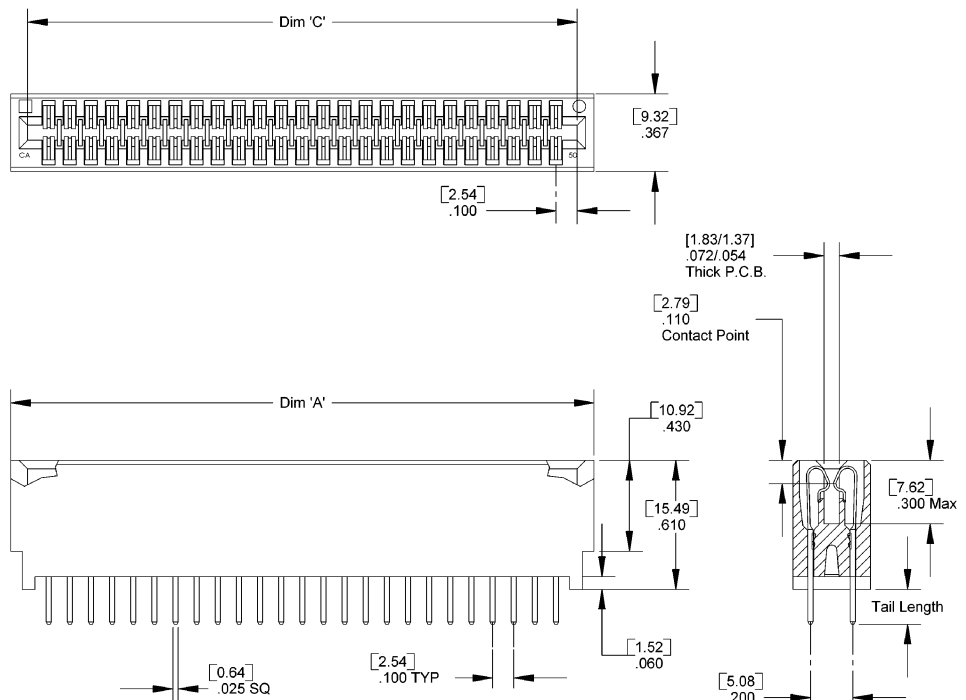

Mating Product: PCB edge card
Drawing Number: CA-610038

For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298

