


3

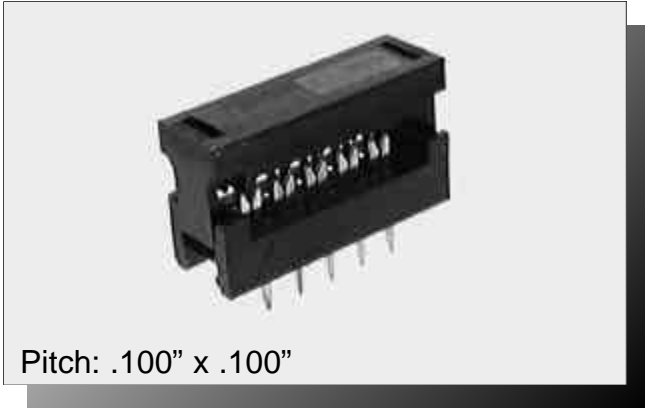

Pitch: .100" x .100"

## INSULATION DISPLACEMENT TRANSITION BOARD CONNECTOR

### **SPECIFICATIONS**

#### **ENVIRONMENTAL**

Temperature Range: -55°C to +105°C

#### **MECHANICAL**

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Copper Alloy

Contact Plating: Tin

Terminates To: .050" cable, 28 AWG

#### **ELECTRICAL**


Current Rating: 1 AMP

Consult factory for additional options

## CA- POSITION IDSL-1T

POSITION	
08	28
10	30
12	34
14	40
16	50
20	60
24	64
26	

DIMENSIONS		
Position	A	B
08	.610 [15.49]	.30 [7.6]
10	.710 [18.03]	.40 [10.2]
12	.810 [20.57]	.50 [12.7]
14	.910 [23.11]	.60 [15.2]
16	1.010 [25.65]	.70 [17.8]
20	1.210 [30.73]	.90 [22.9]
24	1.410 [35.81]	1.10 [27.9]
26	1.510 [38.35]	1.20 [30.5]
28	1.610 [40.89]	1.30 [33.0]
30	1.710 [43.43]	1.40 [35.6]
34	1.910 [48.51]	1.60 [40.6]
40	2.210 [56.13]	1.90 [48.3]
50	2.710 [68.83]	2.40 [61.0]
60	3.210 [81.53]	2.90 [73.7]
64	3.410 [86.61]	3.10 [78.7]

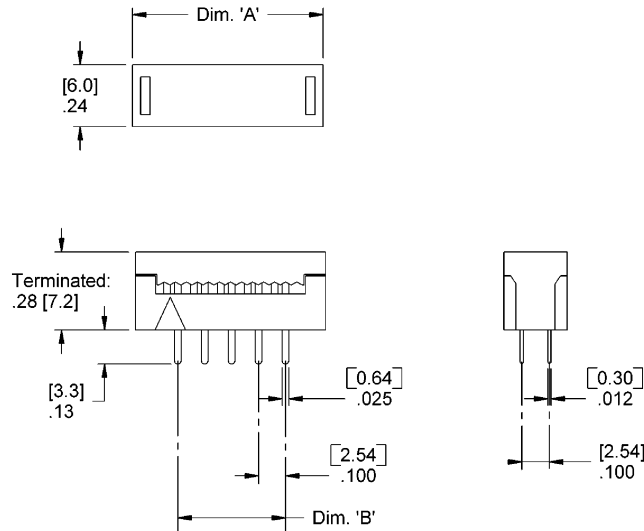

Mating Product: PCB mount  
Drawing Number: CA-620388



For more information please contact our customer service department or visit our website at [circuitassembly.com](http://circuitassembly.com)

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298