

3



Pitch: .050"

INSULATION DISPLACEMENT MICRO RIBBON PLUG

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Contact Material: Beryllium copper

Contact Plating: Mating Area: 30µ IN gold


Terminates To: .025" cable, 30 AWG

ELECTRICAL

Current Rating: 0.5 AMP

CA- MDRS-F-

POSITION	ACCESSORY OPTION
50	LSR = Latching Strain Relief
68	Blank = no strain relief

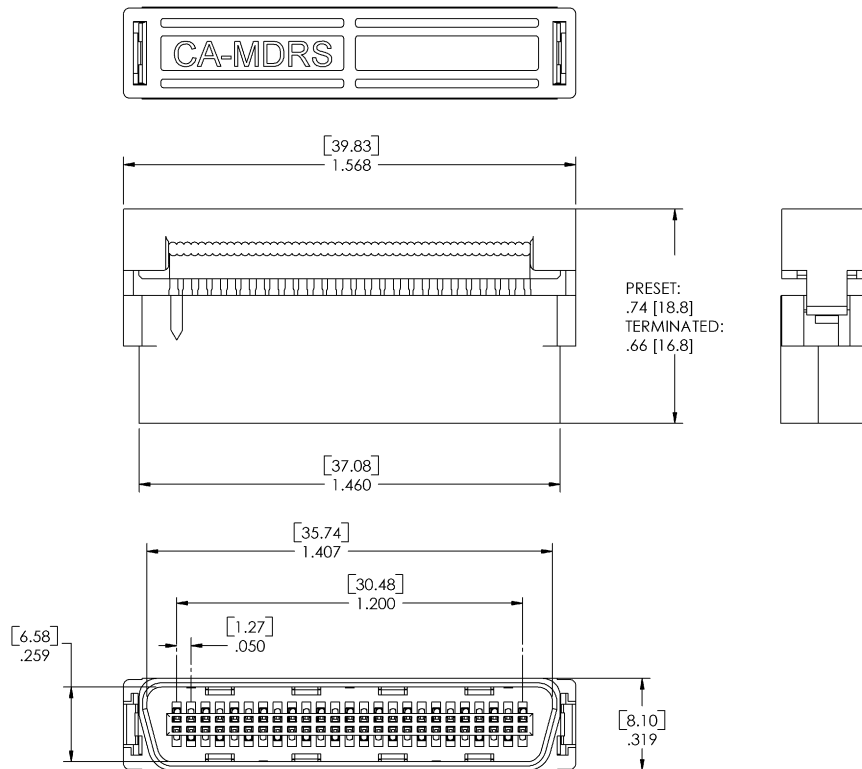

Drawing Number: CA-610292 (50 position) CA-610201 (68 position)