


3

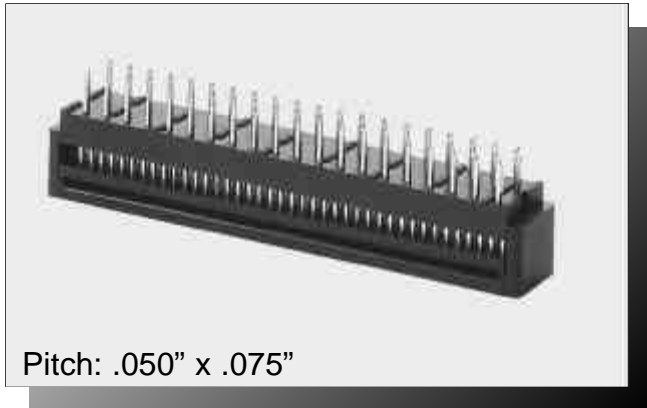

Pitch: .050" x .075"

INSULATION DISPLACEMENT TRANSITION BOARD CONNECTOR

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Phosphor Bronze

Contact Plating: Tin

Terminates To: .025" cable, 30 AWG

ELECTRICAL

Current Rating: 0.5 AMP

Consult factory for additional options


CA- NFTSL-

POSITION	TAIL LENGTH
68	ST = .100"
80	1T = .130"


DIMENSIONS		
Position	A	B
68	1.886 [47.90]	1.650 [41.91]
80	2.186 [55.52]	1.950 [49.53]



Patented 4 Point/3 Blade

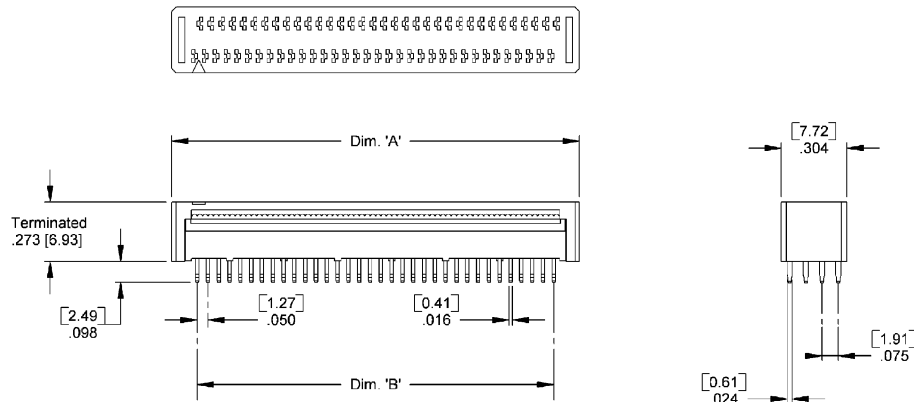

CA-68NFTSL shown

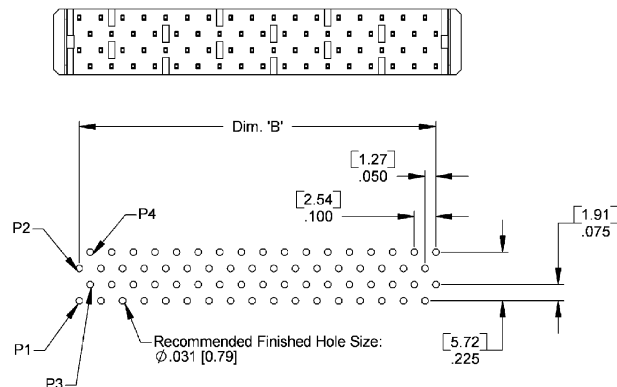

Recommended PCB Layout
(Component Side)

Mating Product: PCB Mount
Drawing Number: CA-620363

