



EVC, PLUG AND DISPLAY SOCKET VERTICAL

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -20°C to +85°C

MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Shell Material: Zinc Alloy

Contact Material: Phosphor Bronze

Contact Plating: See options below

ELECTRICAL

Current Rating: 1.5 AMP @ 40V

Insulation Resistance: 1000 Megohms Min.

Dielectric Withstanding: 500V AC (rms)


Contact Resistance: 20 Milliohms max

Consult factory for additional options

CA- PND V- -

POSITION	TYPE	PLATING	MOUNTING
30 (digital)	D = digital (30)	A = gold flash	1 = 4-40 threaded insert
35 (integrated or analog)	A = analog (35)	C = 15μ IN gold	2 = 4-40 hex screwlock (pkg separately)
	I = integrated (35)	F = 30μ IN gold	

TYPE I (P&D)

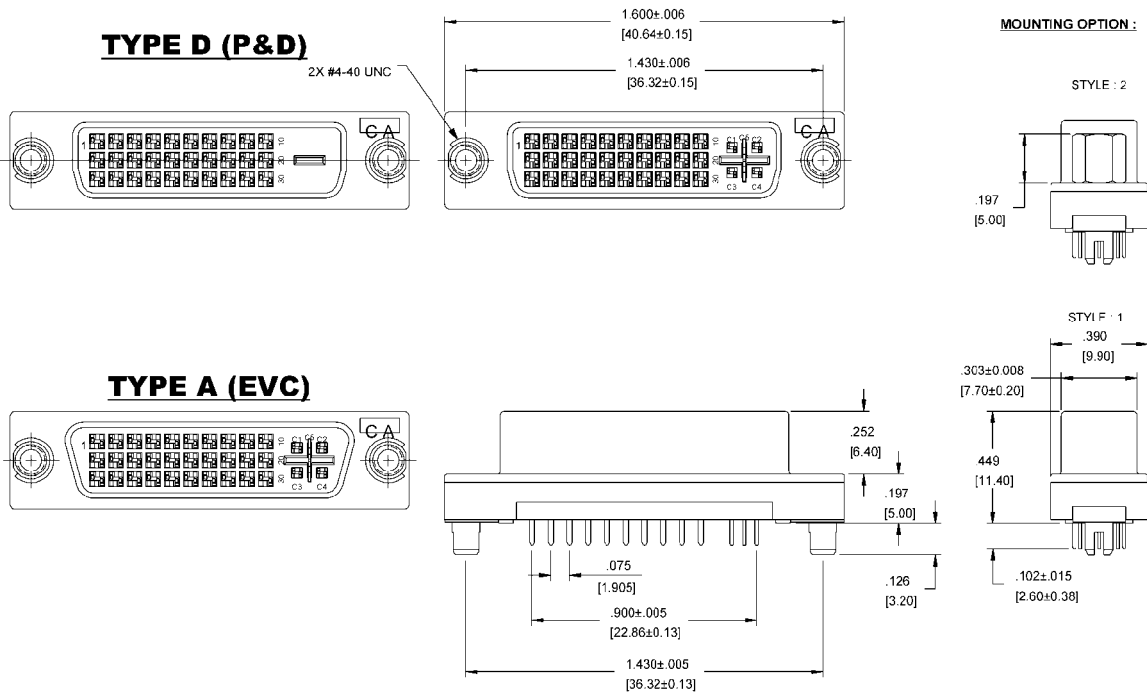

Mating Product: PNDP (page 18)

Drawing Numbers: CA-T610041, 42, 43

For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298