

Pitch: 2mm

## 2MM CENTER STRIP HEADER RIGHT ANGLE

### SPECIFICATIONS

#### ENVIRONMENTAL

Temperature Range: -55°C to +105°C

#### MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Contact Material: Copper Alloy

Contact Plating: Gold Flash


#### ELECTRICAL

Current Rating: 1 AMP

Consult factory for additional sizes

CA- SERIES POSITION R-15A-11

| SERIES          | POSITION              |
|-----------------|-----------------------|
| SM = Single Row | 43 = single row of 43 |
| DM = Dual Row   | 86 = dual rows of 43  |

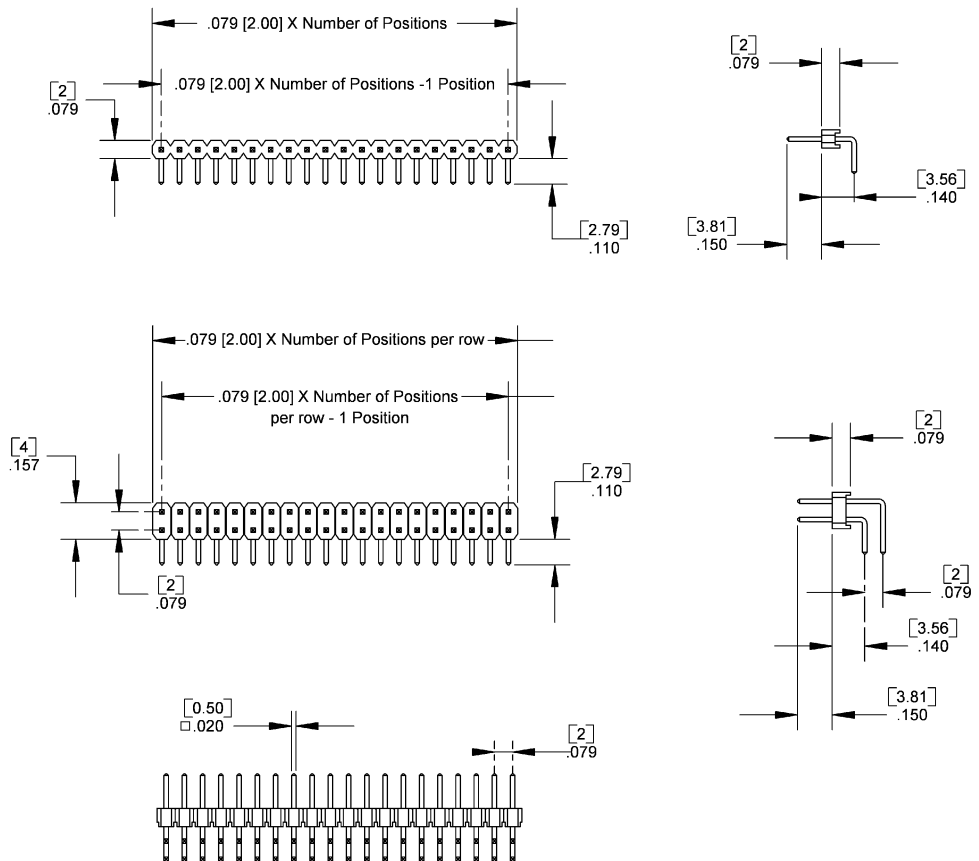

Mating Product: MID (page 87), SMVS (page 125), DMVS (page 125), SJO-MA (page 124)

Drawing Number: CA-620416



For more information please contact our customer service department or visit our website at [circuitassembly.com](http://circuitassembly.com)

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298