

Pitch: .100"

# MODULAR, .025" SQUARE SYSTEM, STRIP HEADER LOW PROFILE RIGHT ANGLE

### SPECIFICATIONS

#### ENVIRONMENTAL

Temperature Range: -55°C to +105°C

#### MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Copper Alloy

Contact Plating: Gold Flash


#### ELECTRICAL

Current Rating: 1 AMP

Consult factory for additional pin length options

CA- SERIES POSITION R-24A-12

SERIES	POSITION
S = Single Row	Single Row 01 thru 40
D = Dual Row	Dual Row 02 thru 80

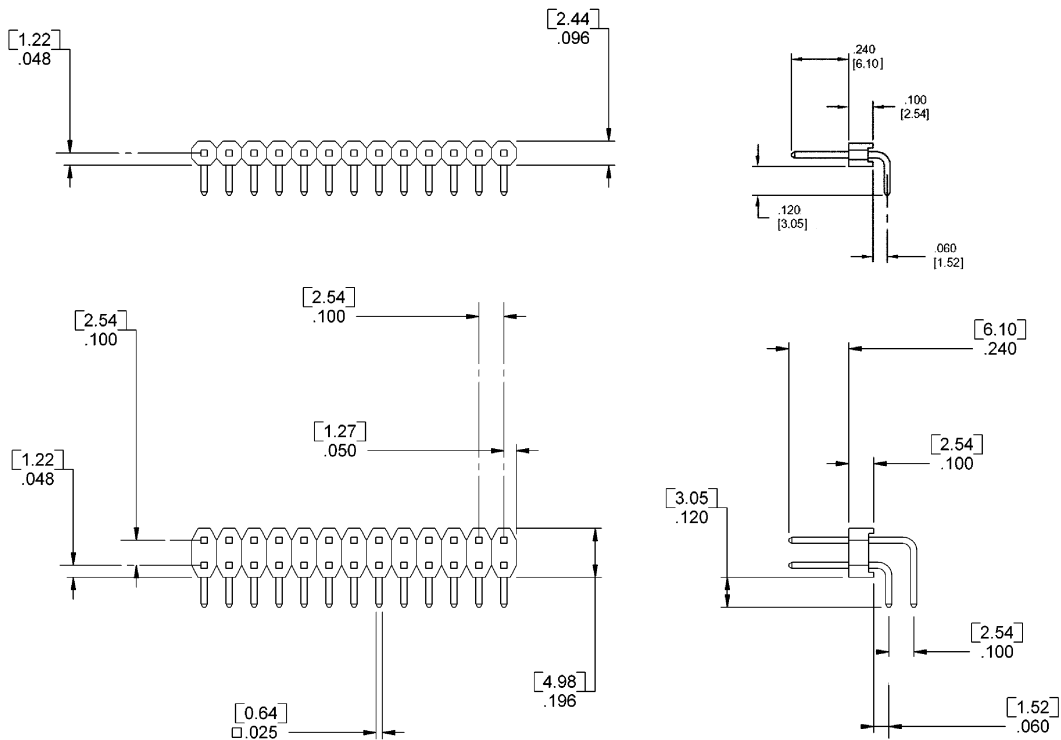

Mating Product: SJ (page 116), VSC (page 117)  
Drawing Number: CA-620392



For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298