

Pitch: .100"

# MODULAR, .025" SQUARE SYSTEM, STRIP SOCKET RIGHT ANGLE

## SPECIFICATIONS

### ENVIRONMENTAL

Temperature Range: -55°C to +105°C

### MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Phosphor Bronze

Contact Plating: 10µ IN gold


### ELECTRICAL

Current Rating: 1 AMP


Consult factory for additional options

CA- SERIES POSITION VSCR-12B

SERIES	POSITION
S = Single Row	Single Row 01 thru 36
D = Dual Row	Dual Row 04 thru 72

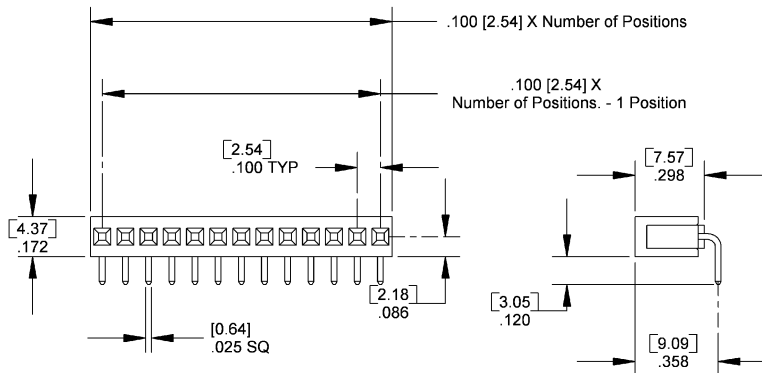

Maximum insertion depth for mating pin:  
.198 Single .218 Dual

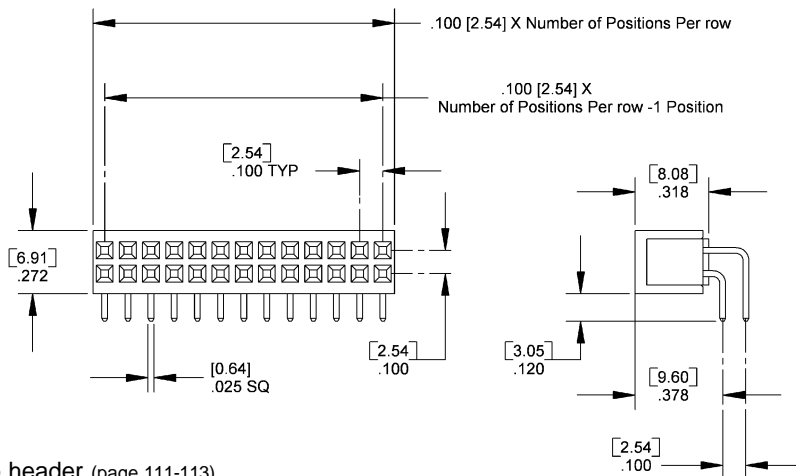

Mating Product: .100" strip header (page 111-113)

Drawing Number: CA-610248



For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298