

Pitch: .100"

IDT EDGE CARD

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Contact Material: Copper Alloy

Contact Plating: Gold Flash

Terminates To: .050" cable, 28 AWG

ELECTRICAL



Current Rating: 1 AMP

Consult factory for additional options

CA- POSITION ECID-3A

POSITION	
14	40
20	50
26	62
34	64

DIMENSIONS			
Position	A	B	C
14	1.080 [27.44]	.600 [15.24]	.807 [20.50]
20	1.380 [35.06]	.900 [22.86]	1.107 [28.12]
26	1.680 [42.68]	1.200 [30.48]	1.407 [35.74]
34	2.080 [52.84]	1.600 [40.64]	1.807 [45.90]
40	2.380 [60.46]	1.900 [48.26]	2.107 [53.52]
50	2.880 [73.16]	2.400 [60.96]	2.607 [66.22]
62	3.480 [88.40]	3.000 [76.20]	3.207 [81.45]
64	3.580 [90.94]	3.100 [78.74]	3.307 [84.00]

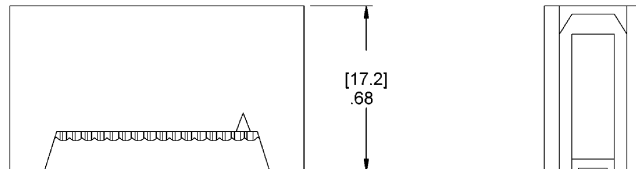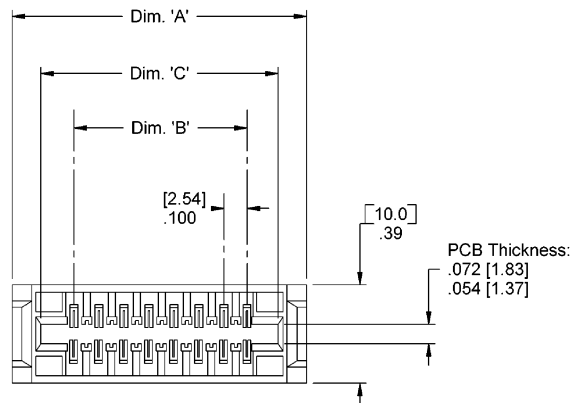

Mating Product: .062" PCB edge card

Drawing Number: CA-610160



For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298