


3

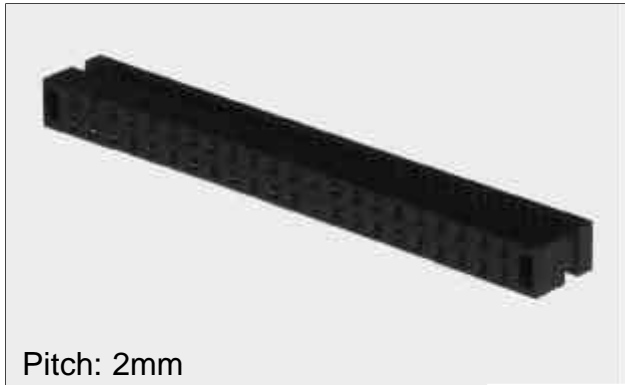

Pitch: 2mm

INSULATION DISPLACEMENT LOW PROFILE 2MM SOCKET

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Contact Material: Copper Alloy

Contact Plating: Gold Flash

Terminates To: 1mm cable, 28 AWG

CTRICAL



Current Rating: 1 AMP

Contact factory for additional options

CA- MIDL-A- - [

POSITION	KEY	POLARIZ
40 50	1 = w/key pin	1 = w/polariz
44	2 = no key pin	2 = no polari:

DIMENSIONS		
Position	A	B
40	1.740 [44.20]	1.496 [38.00]
44	1.898 [48.20]	1.654 [42.00]
50	2.134 [54.20]	1.809 [48.00]

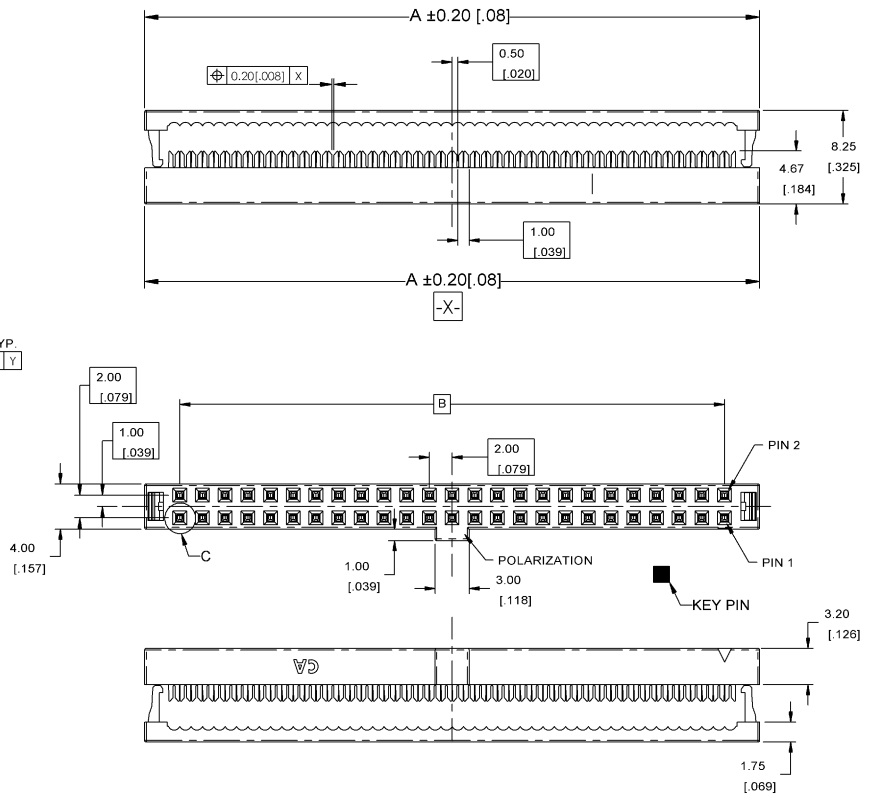

Mating Product:
Drawing Number: CA-H610400

